


MEASUREMENT GUIDELINES FOR DUNGAS

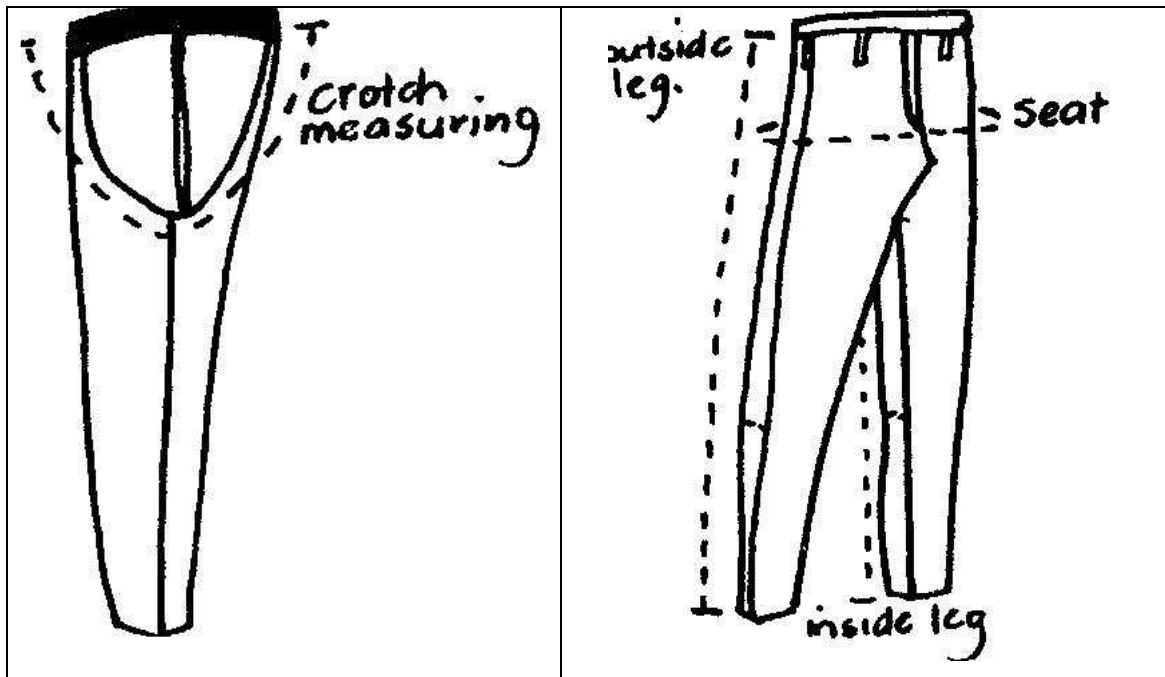

WAIST : Should always be taken where you would like your belt to fit

SEAT : taken at the largest part around the seat, a loose fitting for comfort

CROTCH : Should be taken from the bottom of the front waistband through the crotch to bottom of back waistband.

OUTSIDE LEG : Should be taken from bottom of waist band to bottom of leg

INSIDE LEG : should be taken from the bottom of the leg up the inside seam to crotch